

VP-220 T (Y)型過濾器

T (Y) type Strainer

● Filter options include several mesh sizes with easy and rapid interchangeability.

● Filter Specification :

T type-SUS 304 / 316 :

60 / 40 / 20 mesh

PP/PVC/CPVC : 3~8mm

Y type-SUS 304 / 316 :

60 / 40 / 20 mesh

PE : 20 mesh

● 濾網拆卸清洗方便

● 濾網規格 :

T型-SUS 304 / 316,

60 / 40 / 20 mesh

PP/PVC/CPVC

3~8mm孔目等客戶訂製規格

Y型-PE / 20 mesh

SUS / 40 / 60 mesh

註 : Comparative Particle size

20 Mesh ≈ 0.034 inches

40 Mesh ≈ 0.015 inches

60 Mesh ≈ 0.0092 inches

Type 品號	Size 尺寸	Standard 規格	Material 材質	Gasket / O-ring 墊圈 / O環	End type 接口
VP-220 T type	2"~8"	ANSI, JIS, DIN	PVC	EPDM, PTFE, FPM	Flanged
VP-220 Y type	1/2"~2"	ANSI, JIS, DIN	PVC	EPDM, FPM	Union, Socket, Flanged
VP-221 T type	2"~8"	ANSI, JIS, DIN	CPVC	EPDM, PTFE, FPM	Flanged
VP-221 Y type	1/2"~2"	ANSI, JIS, DIN	CPVC	EPDM, FPM	Union, Socket, Flanged



T-type Strainer DIM.

Nom.	SIZE	50mm	65mm	80mm	100mm	150mm	200mm
		(2")	(2-1/2")	(3")	(4")	(6")	(8")
JIS	D	155	175	185	210	285	330
	D1	120	140	150	175	240	290
	n-øe	4-ø19	4-ø19	8-ø19	8-ø19	8-ø23	12-ø23
ANSI	D	152	178	191	229	285	343
	D1	121	140	152	191	241	299
	n-øe	4-ø19	4-ø19	4-ø19	8-ø19	8-ø23	8-ø23
DIN	D	165	185	200	220	285	343
	D1	125	145	160	180	240	295
	n-øe	4-ø18	4-ø18	8-ø18	8-ø18	8-ø22	8-ø22
L		200	240	260	300	400	500
H		165	168.5	169	217	285	338
T		20	22	22	24	26	30

NO.	PART	MATERIAL	QTY
1	BODY 本體	UPVC, CPVC	1
2	BONNET 上蓋	UPVC, CPVC	1
3	90° ELL 90度彎頭	UPVC, CPVC	1
4	INNER BODY 內濾網本體	UPVC, CPVC	1
5	OUTER BODY 外濾網本體	UPVC, CPVC	1
6	GASKET 本體墊圈	EPDM, FPM, PTFE	1
7	FILTER 濾網	PP, SUS	1
8	BOLT SETS 螺絲組	STEEL-SUS,304	8~16

Y-type Strainer (Flanged) DIM.





Nom.	SIZE	15mm	20mm	25mm	32mm	40mm	50mm
		(1/2")	(3/4")	(1")	(1-1/4")	(1-1/2")	(2")
JIS	D	95	100	125	135	140	155
	D1	70	75	90	100	105	120
	L	160	175	202	245	247	292
	T	14	15	15	16	16	20
	n-øe	4-ø15	4-ø15	4-ø19	4-ø19	4-ø19	4-ø19
ANSI	D	89	98	108	117	127	152
	D1	61	70	79	89	98	121
	L	154	170	200	245	250	290
	T	11	12	14	16	17.5	19
	n-øe	4-ø16	4-ø16	4-ø16	4-ø16	4-ø16	4-ø19

Y-type Strainer (Union) DIM.

Nom.	SIZE	15mm	20mm	25mm	32mm	40mm	50mm
		(1/2")	(3/4")	(1")	(1-1/4")	(1-1/2")	(2")
JIS	d1	22.30	26.30	32.33	38.43	48.46	60.56
	d2	21.70	25.70	31.67	37.57	47.54	59.44
	l	22.22	25.4	28.58	31.75	34.93	38.10
ANSI	d1	21.54	26.87	33.65	42.42	48.56	60.63
	d2	21.23	26.57	33.27	42.04	48.11	60.17
	l	22.22	25.40	28.58	31.75	34.93	38.10
DIN	d1	20.30	25.30	32.30	40.30	50.30	63.30
	d2	19.90	24.90	31.90	39.90	49.90	62.90
	l	16	19	22	26	31	38
D		46.5	55	66	82	98	120
L		202	233	261	324	334	377
L1		56	64	72	87	90	98

Y-type Strainer (Socket) DIM.

Nom.	SIZE	15mm	20mm	25mm	32mm	40mm	50mm
		(1/2")	(3/4")	(1")	(1-1/4")	(1-1/2")	(2")
ANSI	d1	21.54	26.87	33.65	42.42	48.56	60.63
	d2	21.23	26.57	33.27	42.04	48.11	60.17
	l	22.22	25.40	28.58	31.75	34.93	38.10
D		30	36	44	61	61	77
L		90	105	117	150	154	181

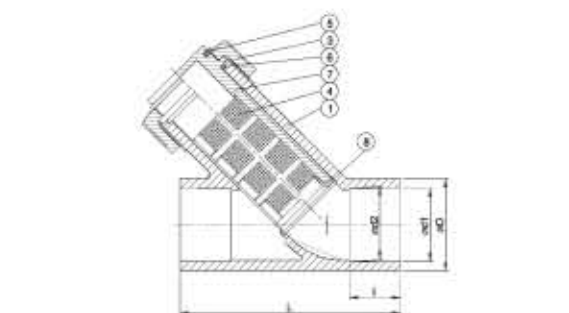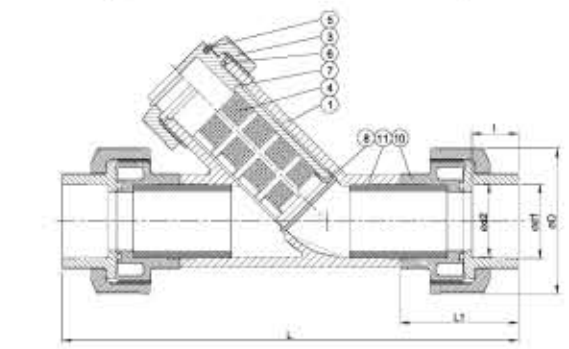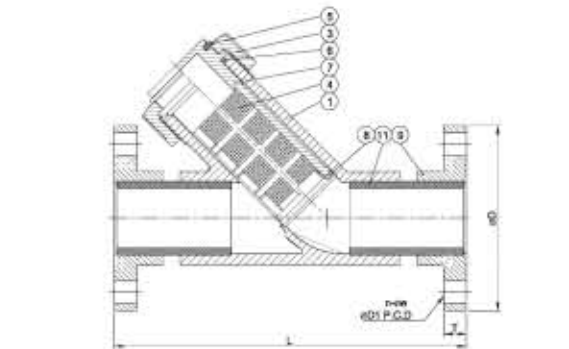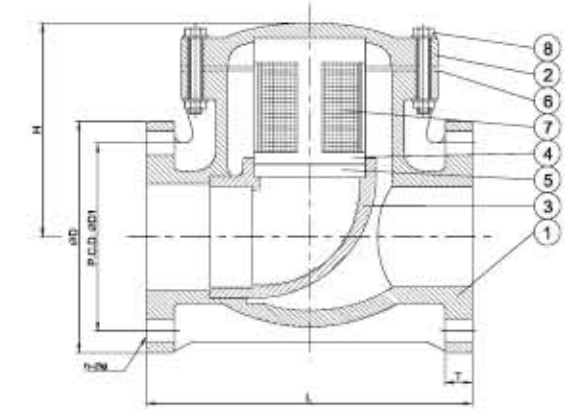

NO.	PART	MATERIAL	QTY
1	BODY 本體	UPVC, CPVC	1
3	UNION NUT 螺帽	UPVC, CPVC	1
4	FILTER 濾網	PP, PE, SUS	1
5	SET RING 卡環	UPVC, CPVC	1
6	O-RING 本體O環	EPDM, FPM	1
7	FILTER HOLDER 濾網架	UPVC, CPVC	1
8	RETAINING RING 蓋子	UPVC, CPVC	1
9	FLANGE 法蘭片	UPVC, CPVC	2
10	UNION 由令	UPVC, CPVC	2
11	PIPE 直管	UPVC, CPVC	2